


# M1000TT *Intermec* ©

Pallet label applicator with Intermec printer PX4 or PX6

- Intermec reliable and rugged 24/7 printers PX4 or PX6 based side and top applicator
- M1000TT offers all Intermec printer functionality with wide range of ready to use software
- M1000TT enables printing from Windows or Unix based program in network

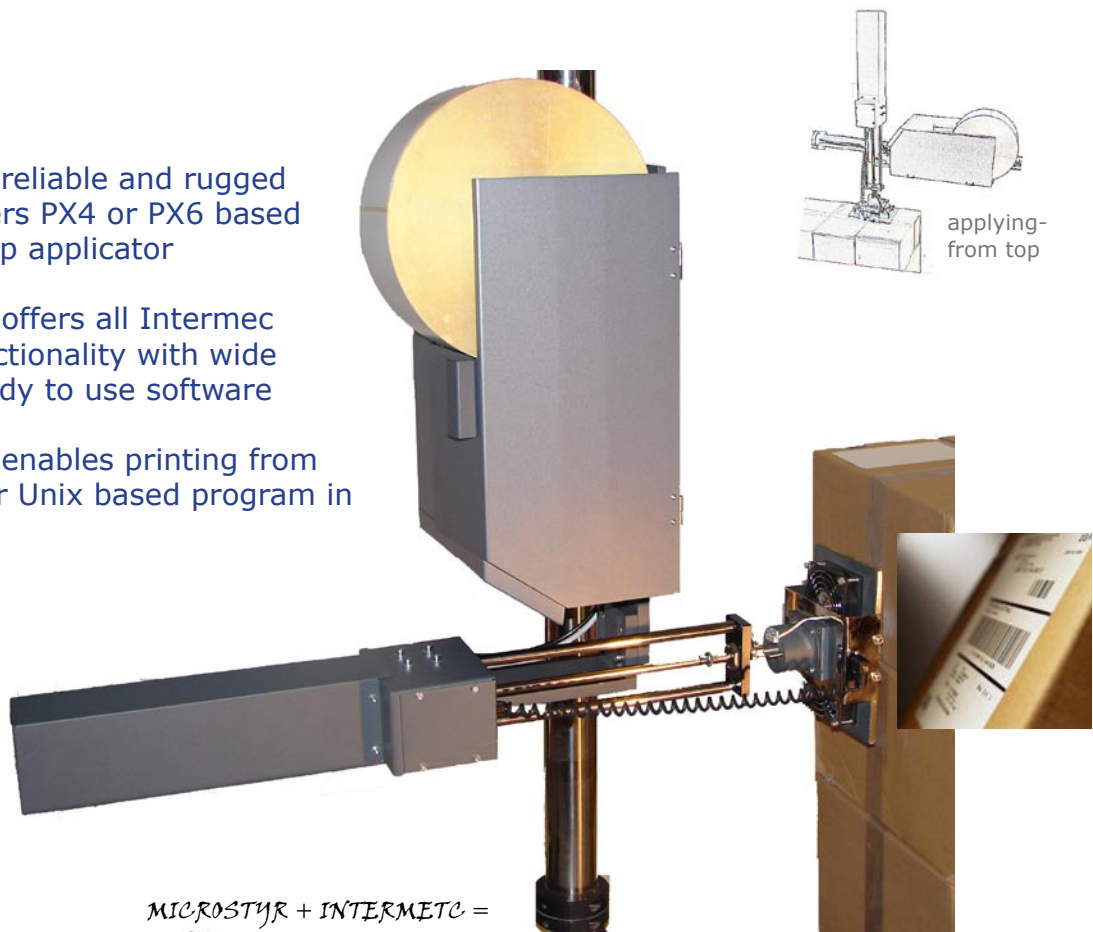

MICROSTYR + INTERMEC =



M1000TT

## **Product data**

### Application

- Direct Thermal (DT) and Thermal Transfer (TT) printing of adhesive labels, tickets and tags.

### Physical Characteristics

- LxHxW: 1600 x 800 x 335 mm
- Weight: 25 kg

### Print Specifications

- Max. Print Width: 167.4 (6.59 in)
- Max. Length with extended memory: 4095 mm (161 in) at 203 dpi
- 2775 mm (109 in) at 300 dpi

### Print Speed

- 100 - 225 mm/s (4 - 9 ips) variable

### Available software

- Intermec Printer Application Server™
- ERPLabel™ for SAP™ R/3®.

### Print Resolution

- 8 dots/mm (203 dpi), 11.8 dots/mm\* (300 dpi)

### Label/Ticket/Tag

- Max. Width: 170 mm (6.69 in)
- Min. Width: 76.2 mm (3.0 in)
- Thickness: 60 to 250µm (2.4 to 10 mil)
- Label Roll max diameter: 213 mm (8.38 in)
- Label Roll Core: 38-76 mm (1.5-3.0 in)

### Ribbon Roll

- Ribbon roll max diameter: 80 mm (3.15 in) corresponding up to 600 m (23 600 in) in length
- Ribbon Roll Core: 25 mm (1.0 in)
- Ribbon Type: Wax, wax/resin, resin

### Standard Interfaces:

- EasyLAN 10/100BaseT internal Ethernet
- RS-232, up to 115.2 kB/s, USB 2.0
- Wand interface for EasySet™ System

### Optional interface:

- EasyLAN Wireless internal Ethernet

ok