



From idea to system


MICROSTYR



M2000TT **DATAMAX**

Label Air-Blow Applicator

- Datamax compact Nova printers based - side and top applicator
- M2000TT offers all Datamax printer functionality
- M2000TT enables printing from Windows or Unix based application in network
- M2000TT can work stand alone

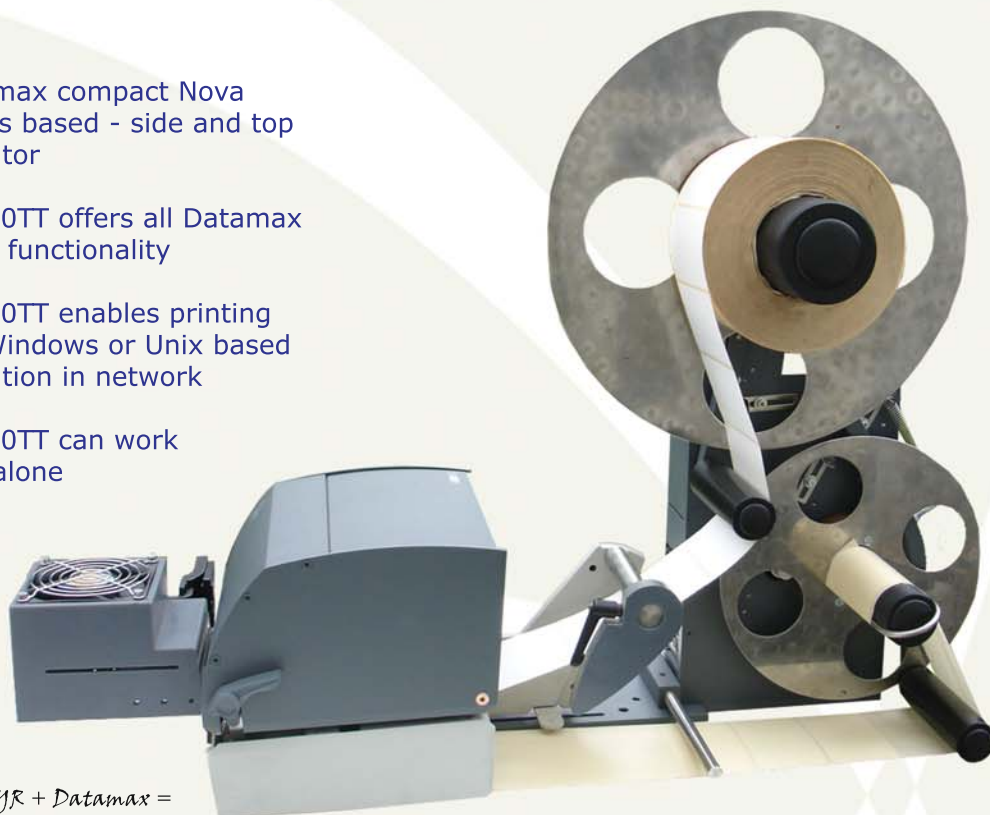

MICROSTYR + Datamax =

M2000TT



Product data

Application

- Direct Thermal (DT) and Thermal Transfer (TT) printing of adhesive labels

Physical Characteristics

- LxHxW: 800 x 600 x 280 mm
- Weight: 20 kg

Print Specifications

- Max. Print Width: 104 mm

Print Speed

- max 250 mm/s
- Print Resolution
- 8 dots/mm (203 dpi)

Power

- 100-230 VAC / 50-60Hz
- Operating temperature 5-40°C (41-104°F)

Memory

- 2 Mb Flash
- 512 Mb SDRAM
- 2 Mb DRAM

Label/Ticket/Tag

- Max. Width: 104 mm (4,09 in)
- Min. Width: 40 mm (1,5 in)
- Thickness: 58 to 180µm
- Label Roll max diameter: 300 mm (11,8 in)
- Label Roll Core: 76 mm (3.0 in)

Ribbon Roll

- Ribbon roll: 300m in length
- Ribbon Roll Core: 25,4 mm (1.0 in)
- Ribbon Type: Wax, wax/resin, resin

Standard Interfaces:

- 2 x RS-232C, up to 115.2 kB/s, USB 2.0
- Ethernet LAN (10BaseT/100BaseTx)

Optional interface:

- Wireless LAN (802.11b)

ok

Manufactured by MICROSTYR , Box 2040, 125 02 ÄLVSJÖ, Sweden
Tel. +46 8 647 77 42, Fax: +46 70 8494902
<http://www.microstyr.se> , email: order@microstyr.se

Blow label applicator M2000TT Image